


MODEL

NHE528

NHE528R

(Reverse taping product of NHE528)

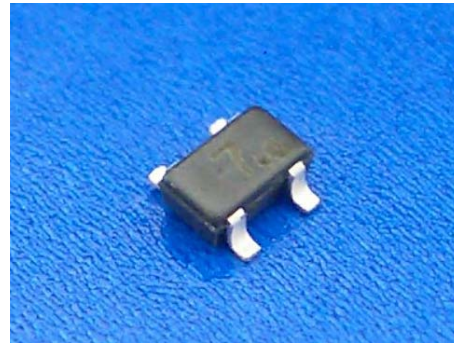

Features

- This is a high sensitivity type of Nicera Hall element using evaporated InSb film.
- It performs effectively in low magnetic fields due to the high sensitivity.
- The input and output resistance values are suitable for transistor circuits.
- Due to its compact package, it is suitable for thin motors.

Applications

- Brushless motors
- DVD drive, CD-ROM drive, floppy disk drive
- Other small precision motors
- Non-contacting magnetic sensors
- Position sensors, rotation sensors, current sensors
- Magnetic flux sensors other than those above

Specification

◆ Halogen and Pb-free products ◆

Nicera is able to supply halogen and Pb-free products.


For these products, "HF" is put at the end of model names as below.

NHE528-HF

NHE528R-HF

◆ Dimensional Drawing ◆

(UNIT: mm)

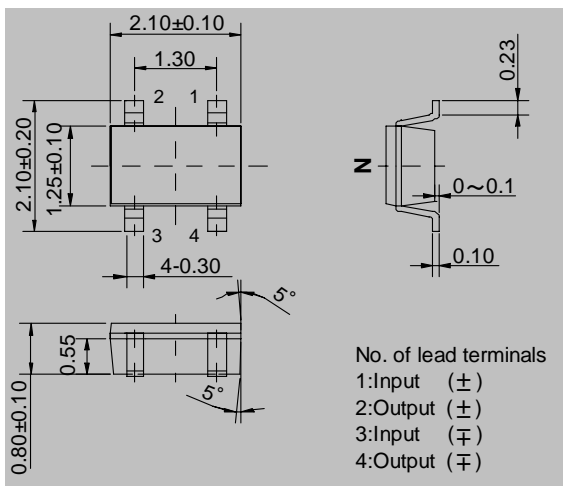

◆ Absolute Maximum Ratings ◆

Item	Symbol	Limit	Unit
Max. Input Current	I _{max}	20(at 25°C)	mA
Operating Temp. Range	T _{opr}	-40~110	°C
Storage Temp. Range	T _{stg}	-40~125	°C

◆ Electrical Characteristics (T=25°C) ◆

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V _H	V _c =1V B=50mT	196		370	mV
Offset Voltage	V _o	V _c =1V B=0mT	-7		7	mV
Input Resistance	R _{in}	I=1mA	240		550	Ω
Output Resistance	R _{out}	I=1mA	240		550	Ω
Temp. Coefficient of V _H	※1 α _{HI}	Standard 20°C Average 0~40°C B=50mT I _c =5mA		-1.8		%/°C
Temp. Coefficient of R _{in}	※2 α _R	B=0mT I _c =0.1mA		-1.8		%/°C

$$\text{※1: } \alpha_{HI} = \frac{1}{V_H(T_1)} \times \frac{[V_H(T_3) - V_H(T_2)]}{(T_3 - T_2)} \times 100$$

$$\text{※2: } \alpha_R = \frac{1}{R_{in}(T_1)} \times \frac{[R_{in}(T_3) - R_{in}(T_2)]}{(T_3 - T_2)} \times 100$$

$$T_1 = 20^\circ\text{C}, T_2 = 0^\circ\text{C}, T_3 = 40^\circ\text{C}$$

◆ Classification of Output Voltage ◆

Model	Rank	V _H (mV)	Conditions
NHE528	5	196~236	Constant Voltage Drive V _H =V _H M-V _o V _H M=Measured Hall Voltage (at 50mT) V _o =Offset Voltage(at 0 mT)
	6	228~274	
	7	266~320	
	8	310~370	

※ Please design with multiple ranks (three ranks or more).

◆ Packaging ◆

Model	Packaging	Reel Max. (pcs)	Carton Max. (pcs)
NHE528	Taping reel	4,000	120,000
NHE528R	Taping reel	4,000	120,000

◆ Characteristics Curve ◆

